

# LowLine LL 03 L Oil / Air Cooler

## 12V / 24V DC



## Technical Data

order number	description	power	current	protection	air flow	noise level	weight
		[kW]	[A]		[kg/s]	[dB(A)]	[kg]
ASA0033GD01	LL 03L 12V DC	0,07	5,4	IP 68	0,13	68	3,5
ASA0033GD02	LL 03L 24V DC	0,07	2,7	IP 68	0,13	68	3,5


## Performance

specific cooling performance


all products  
water/glycol  
compatibel



Contact us!

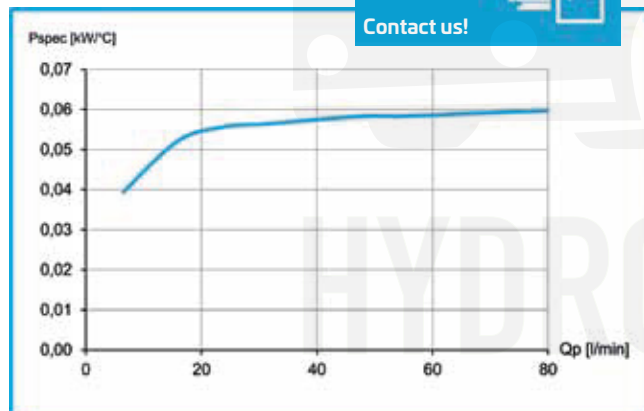

pressure drop at 30cSt

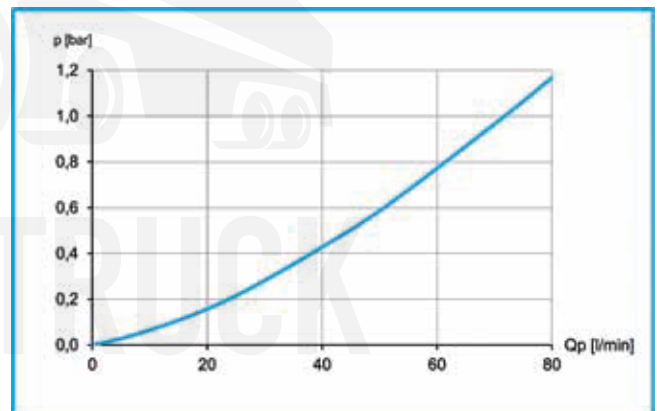

## Radiator Style A

material:	aluminum
working temperature range:	-20°C to +100°C (oil temperature)
air fin shape:	wavy
working pressure:	26 bar (static)

## Options

temperature switches IP65	ILLZTH4765K, ILLZTH6065K (page 39)
temperature switches IP69K	ILLZTH5069K, ILLZTH6069K, ILLZTH9069K (page 39)
temperaure control	ILLZTC12-2K, ILLZTC24-2K (page 37)



[www.hydrotruck.cz](http://www.hydrotruck.cz)  
[info@hydrotruck.cz](mailto:info@hydrotruck.cz)

Hydrotruck s.r.o.  
Tovačovská 3457/4a  
750 02, Přerov  
Česká republika